



● Part Number Guide

T-M-FF.FFFM-LC-FTFS-OT-ESR-TR-S

T(Type 型号): S=HC-49S,2 Leads with height of 3.38mm Max
 S2=HC-49S,2 Leads with height of 2.8mm Max
 S3=HC-49S,2 Leads with height of 2.5mm Max
 SB=HC-49S,3 Leads with height of 3.38mm Max
 SB2=HC-49S,3 Leads with height of 2.8mm Max
 SB3=HC-49S,3 Leads with height of 2.5mm Max

M(Mode of Operation 振荡模式):F=Fundamental T=Third Overtone, etc

F(Frequency 标称频率):Normal – 5 digitals of Frequency, e.g. 8.0000M, 12.000M

Special – All digitals of Frequency, e.g. 13.225625M

LC(Load Capacitance 负载电容):20=20pf 00=series, etc

FT(Frequency Tolerance 调整频差):30=±30ppm, etc

FS(Frequency Stability 温度频差):50=±50ppm, etc

OT(Operating Temperature 工作温度):1060=-10°C to +60°C 4085=-40°C to +85°C, etc

ESR(Equivalent Series Resistance 等效阻抗)

TR(Tape and Reel 编带)

S(Special Requirement 特殊要求)

● Electrical Specifications 电气参数

型号	Holder Type	HC-49U/S
频率范围	Frequency Range	3.2000MHz to 110.00MHz
调整频差	Frequency Tolerance (ΔF) (at25°C)	± 50ppm max
温度频差	Frequency Stability	± 50ppm max
工作温度范围	Operating Temperature Range	-10°C~+60°C to -40°C~+85°C
储存温度范围	Storage Temperature Range	-40°C~+85°C / -55°C~+125°C
老化	Aging (25°C)	±5ppm/Year Maximum
静电容	Shunt Capacitance (C0)	7pF Maximum
激励功率	Drive Level	100μW Typical
绝缘阻抗	Insulation Resistance (Rs)	500 Mega ohms Minimum at D.C100V
负载电容	Load Capacitance (CL)	8pf~32pf or Series

※ Notes: for 2.5mm height, lowest frequency is 10 MHz
 for 2.8mm height, lowest frequency is 6 MHz


● Equivalent Series Resistance and Mode of Operation

等效阻抗和振荡模式

Frequency Range 频率范围	ESR (Ω) 等效阻抗	Mode 振荡模式
3.200-4.000MHz	120Max	Fundamental
4.001-8.000 MHz	80 Max	Fundamental
8.001-30.000 MHz	40 Max	Fundamental
30.001-50.000 MHz	100 Max	Third Overtone
50.001-90.000 MHz	80 Max	Third Overtone
90.001-100.000 MHz	60 Max	Third Overtone

• Mechanical Dimensions 外型尺寸

SS:TWO LEADS (两引线) UNIT(单位): mm (毫米)

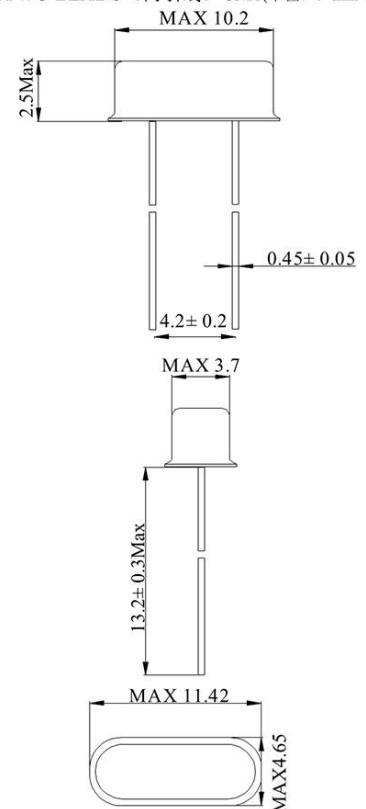

• Reflow Condition 回流焊条件

